

# .049"(1.25mm) Pitch Wire-to-Board Crimp Terminal Housing


## Specifications:

- Current rating: 1A (0.8A for #32 AWG)
- Voltage rating: 125V
- Dielectric withstanding voltage: 250V AC/minute
- Recommended P.C.B. thickness: .031"(0.8mm)
- Insulation resistance: 100MΩ min.
- Contact resistance: 20mΩ max.
- Ambient temperature range: -40 °C ~ 85 °C (including temperature rise)

## 12501TF Series Crimp Terminal

inches  
mm


- Material: Phosphor bronze
- Finished: Tin-plated
- Used in 12501H series housing
- Wire range: AWG #28 ~ #32
- Thickness: 0.2mm

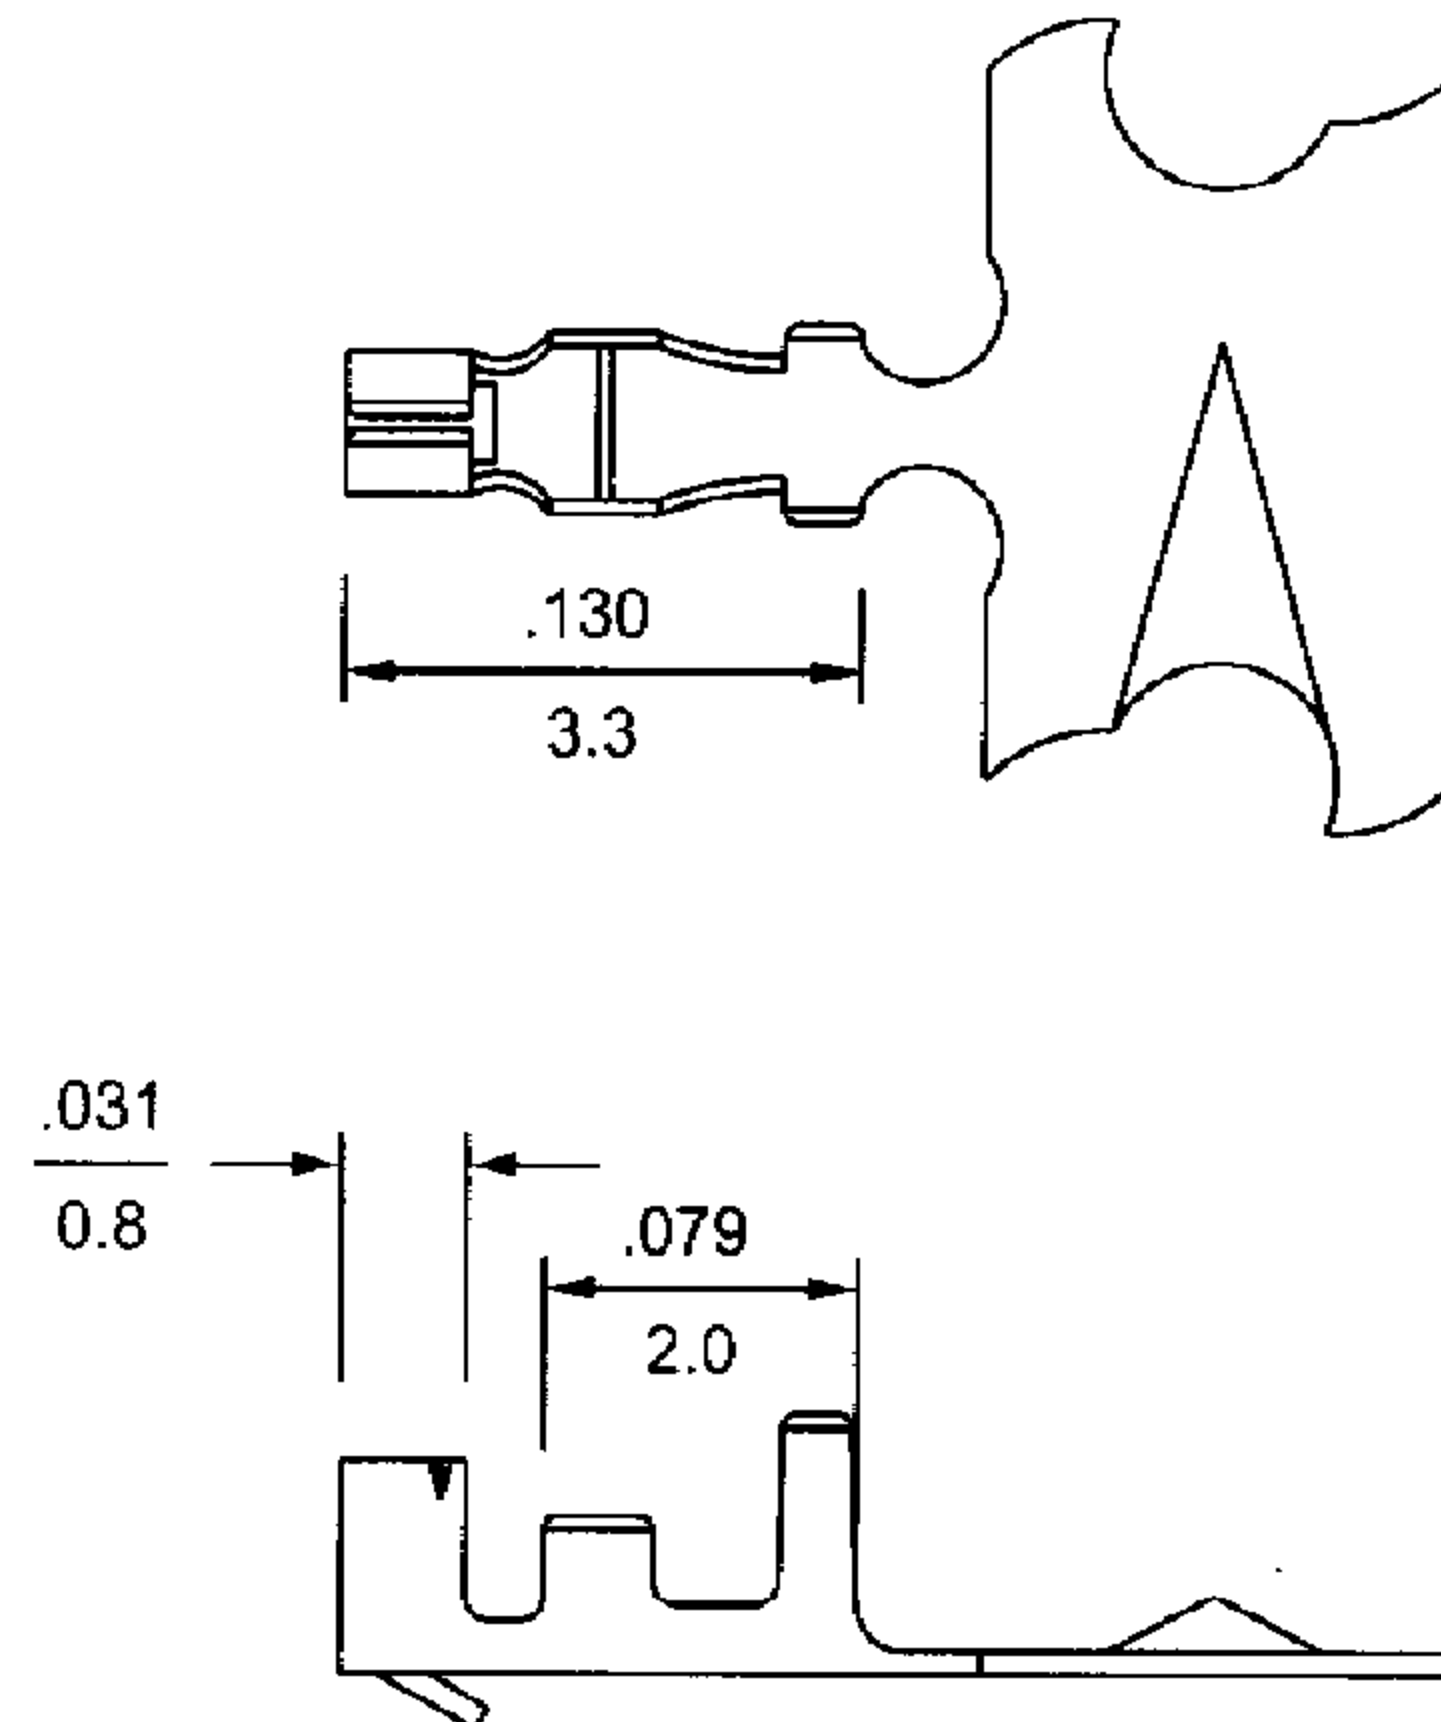

## 12501HM-N Series Receptacle Housing

inches  
mm

- 2 ~ 15 circuits available
- Material: PBT, UL 94V-0
- Accepts 12501T terminal
- Mates with 12501HF-N series housing
- Mates with 12501W series headers

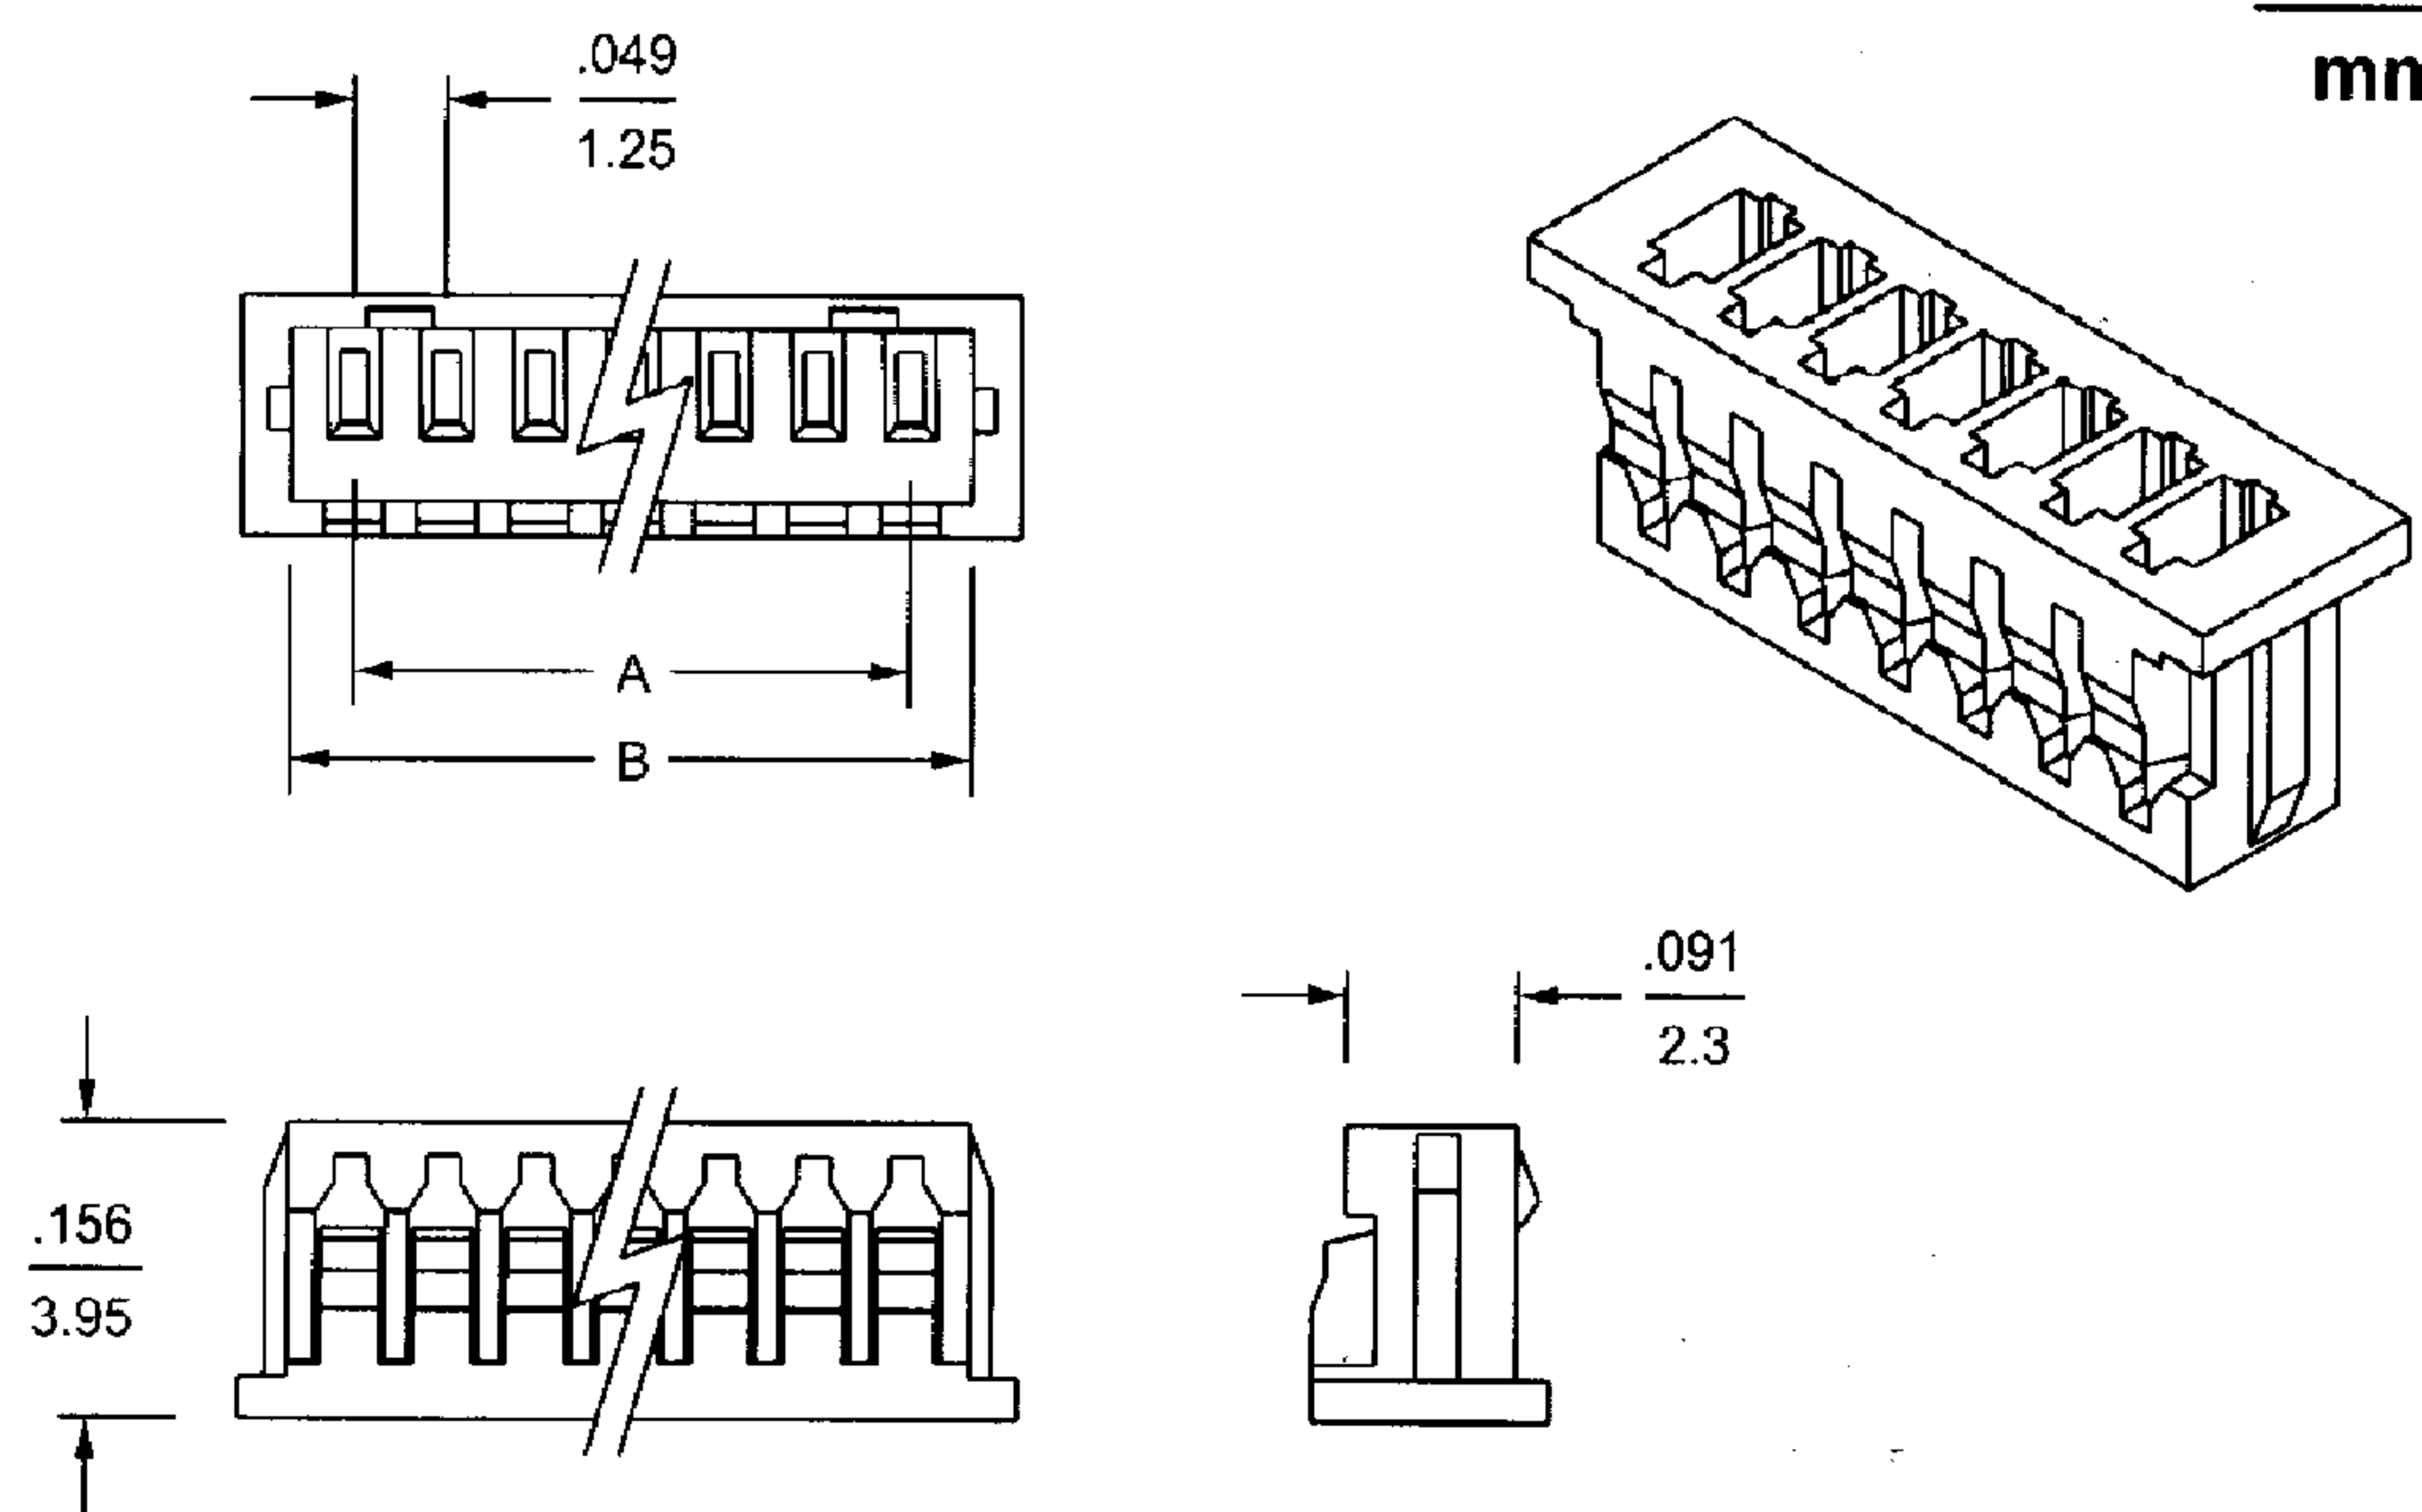

### Dimensional Information - in ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.049 (1.25)	.116 (2.95)	7	.295 ( 7.50)	.362 ( 9.20)	12	.541 (13.75)	.608 (15.45)
3	.098 (2.50)	.165 (4.20)	8	.344 ( 8.75)	.411 (10.45)	13	.591 (15.00)	.657 (16.70)
4	.148 (3.75)	.215 (5.45)	9	.394 (10.00)	.461 (11.70)	14	.640 (16.25)	.707 (17.95)
5	.197 (5.00)	.264 (6.70)	10	.443 (11.25)	.510 (12.95)	15	.689 (17.50)	.756 (19.20)
6	.246 (6.25)	.313 (7.95)	11	.492 (12.50)	.560 (14.20)			