



# .079" (2.0mm) Center Wire-to-Wire System

## 20010TF Series

### Female Crimp Terminal

inches  
mm

- Low profile
- Tin plated phos. bronze
- Used in 20010HM-N series housing
- Wire range: AWG #24 ~ 28
- Insulation diameter:  $\phi$  1.4 mm max.
- Strip length: 1.7 ~ 2.3mm

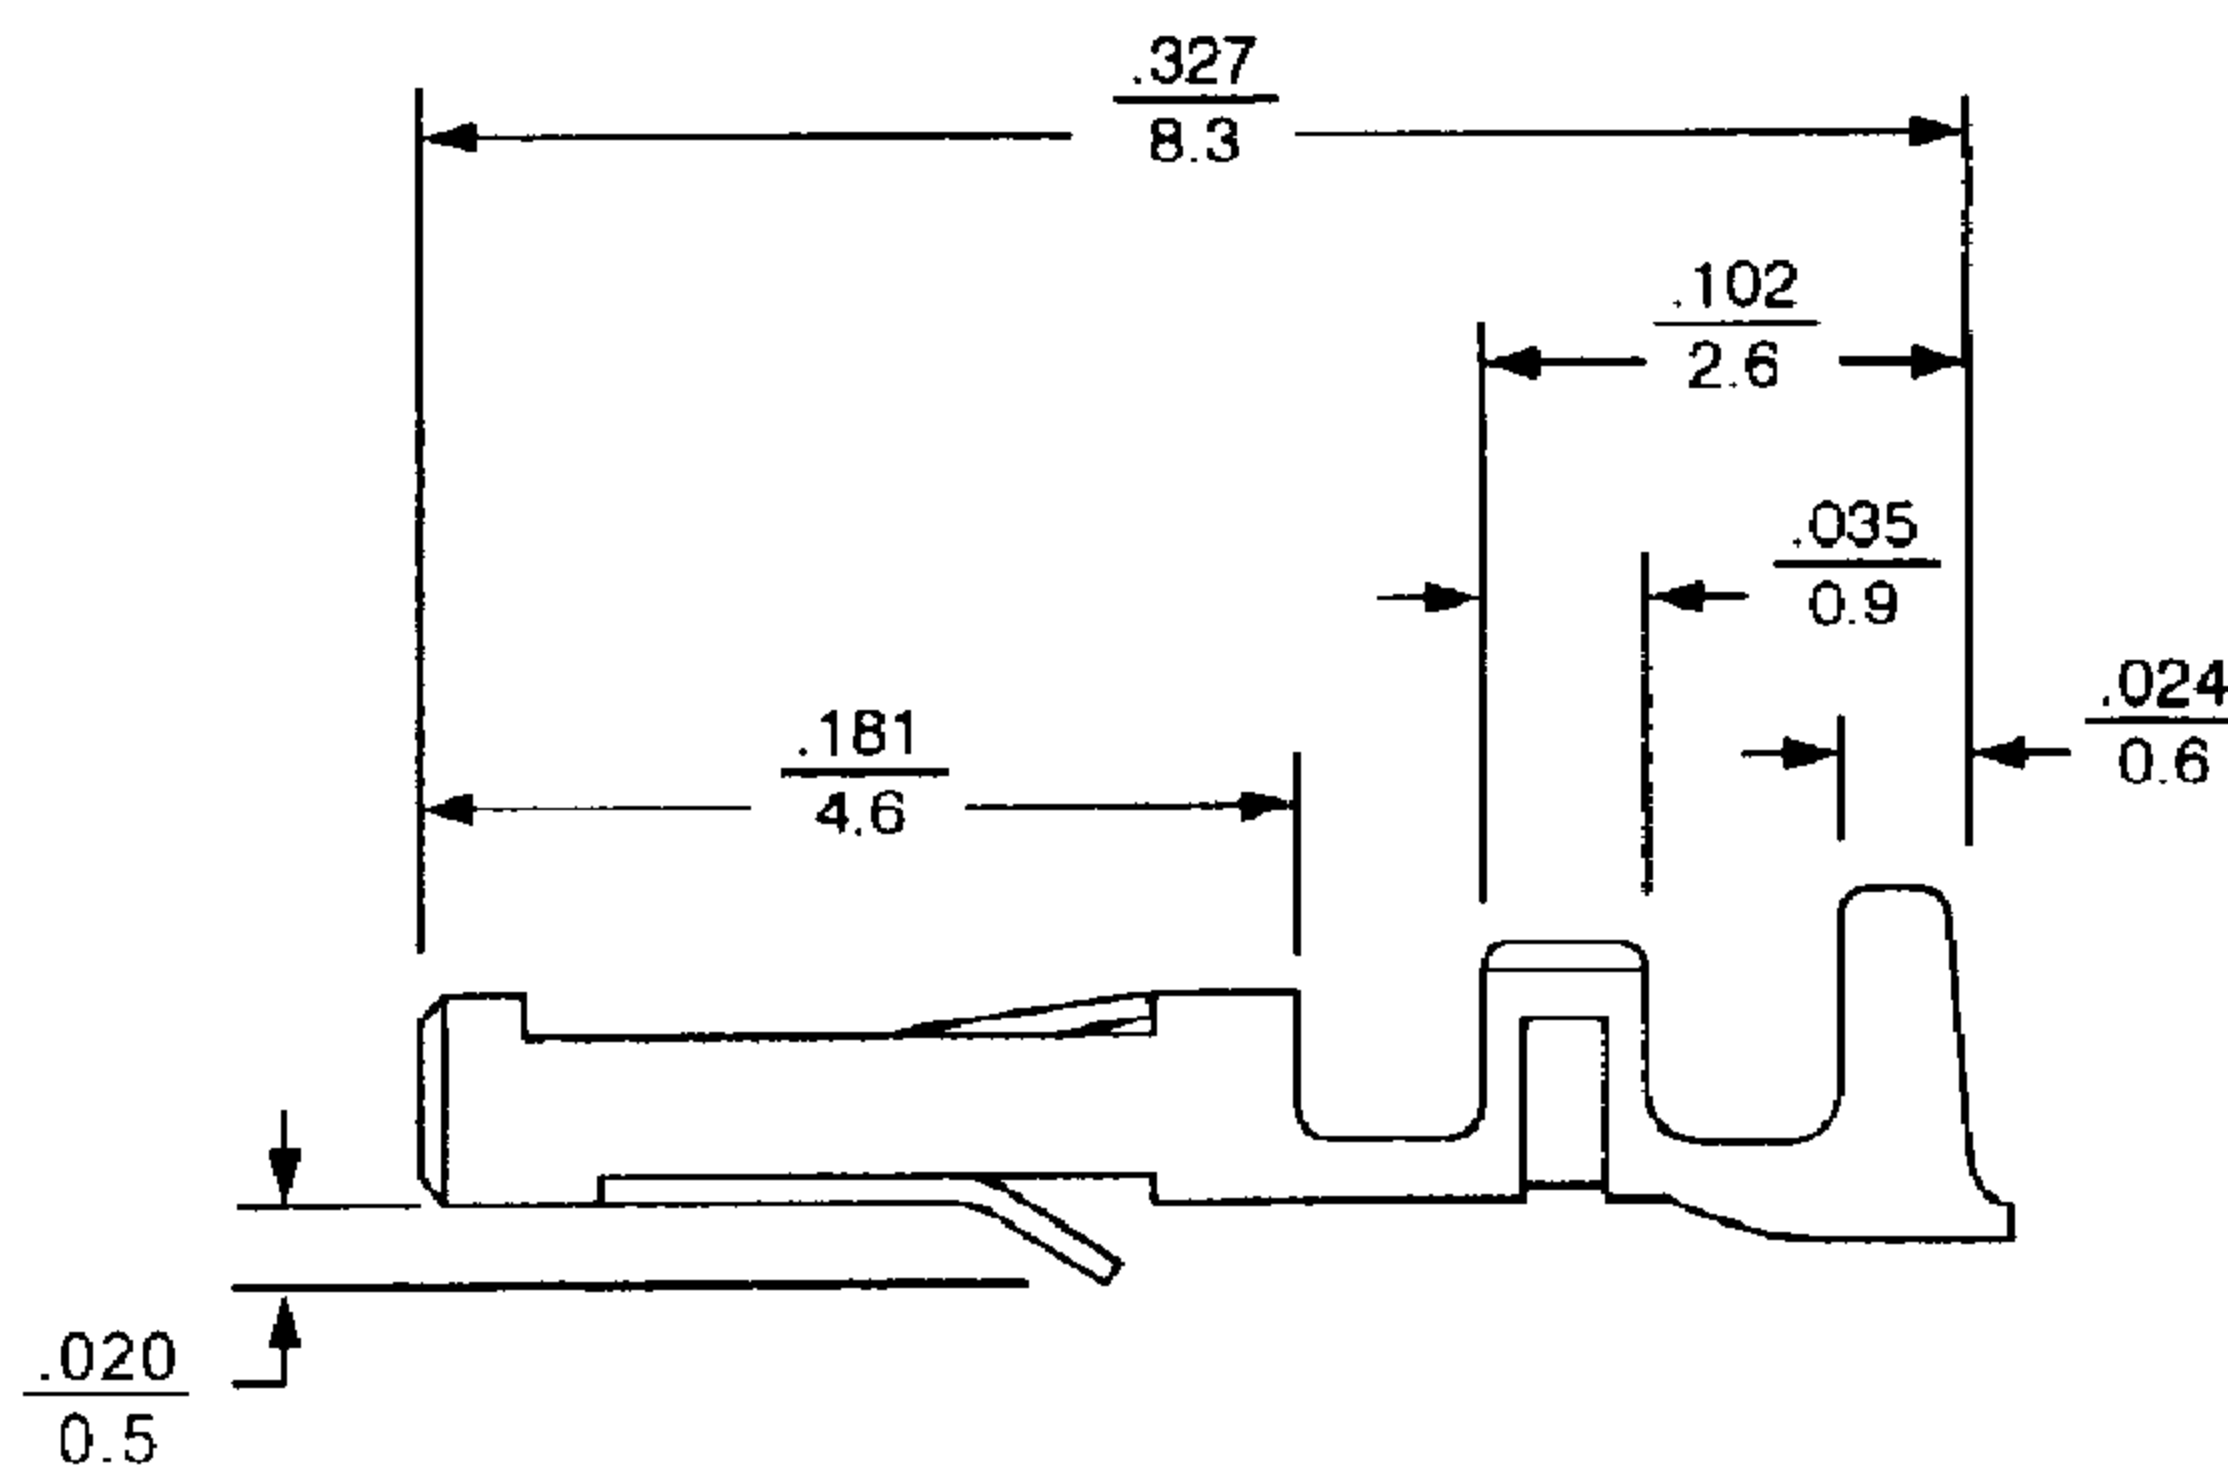
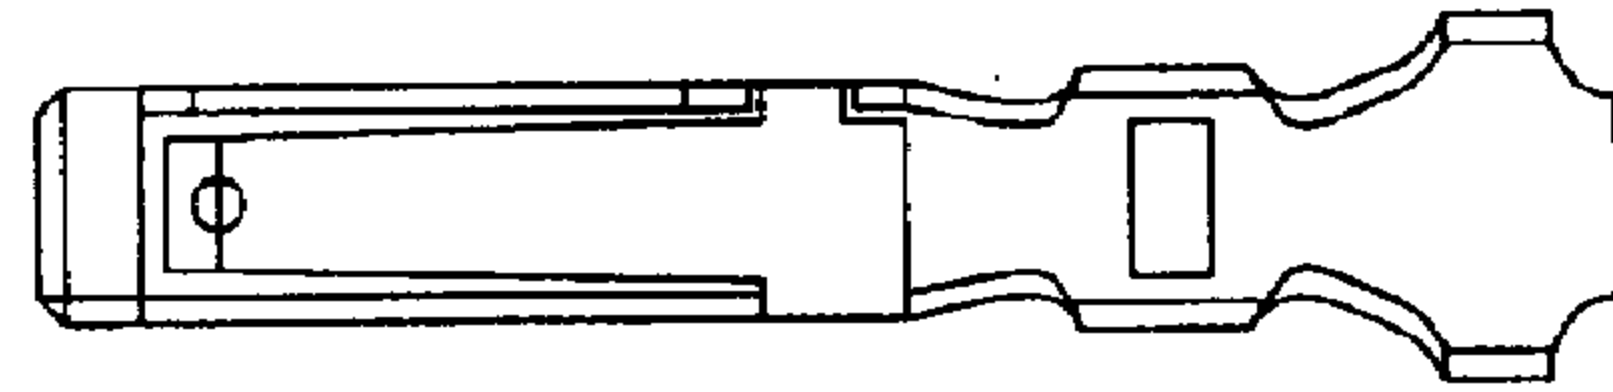


## 20010HM-N Series

### Receptacle Housing

inches  
mm

- 2 ~ 10 Circuits available
- Wire to wire application
- Low profile
- Polyester, UL 94V-0
- Accepts 20010TF terminal

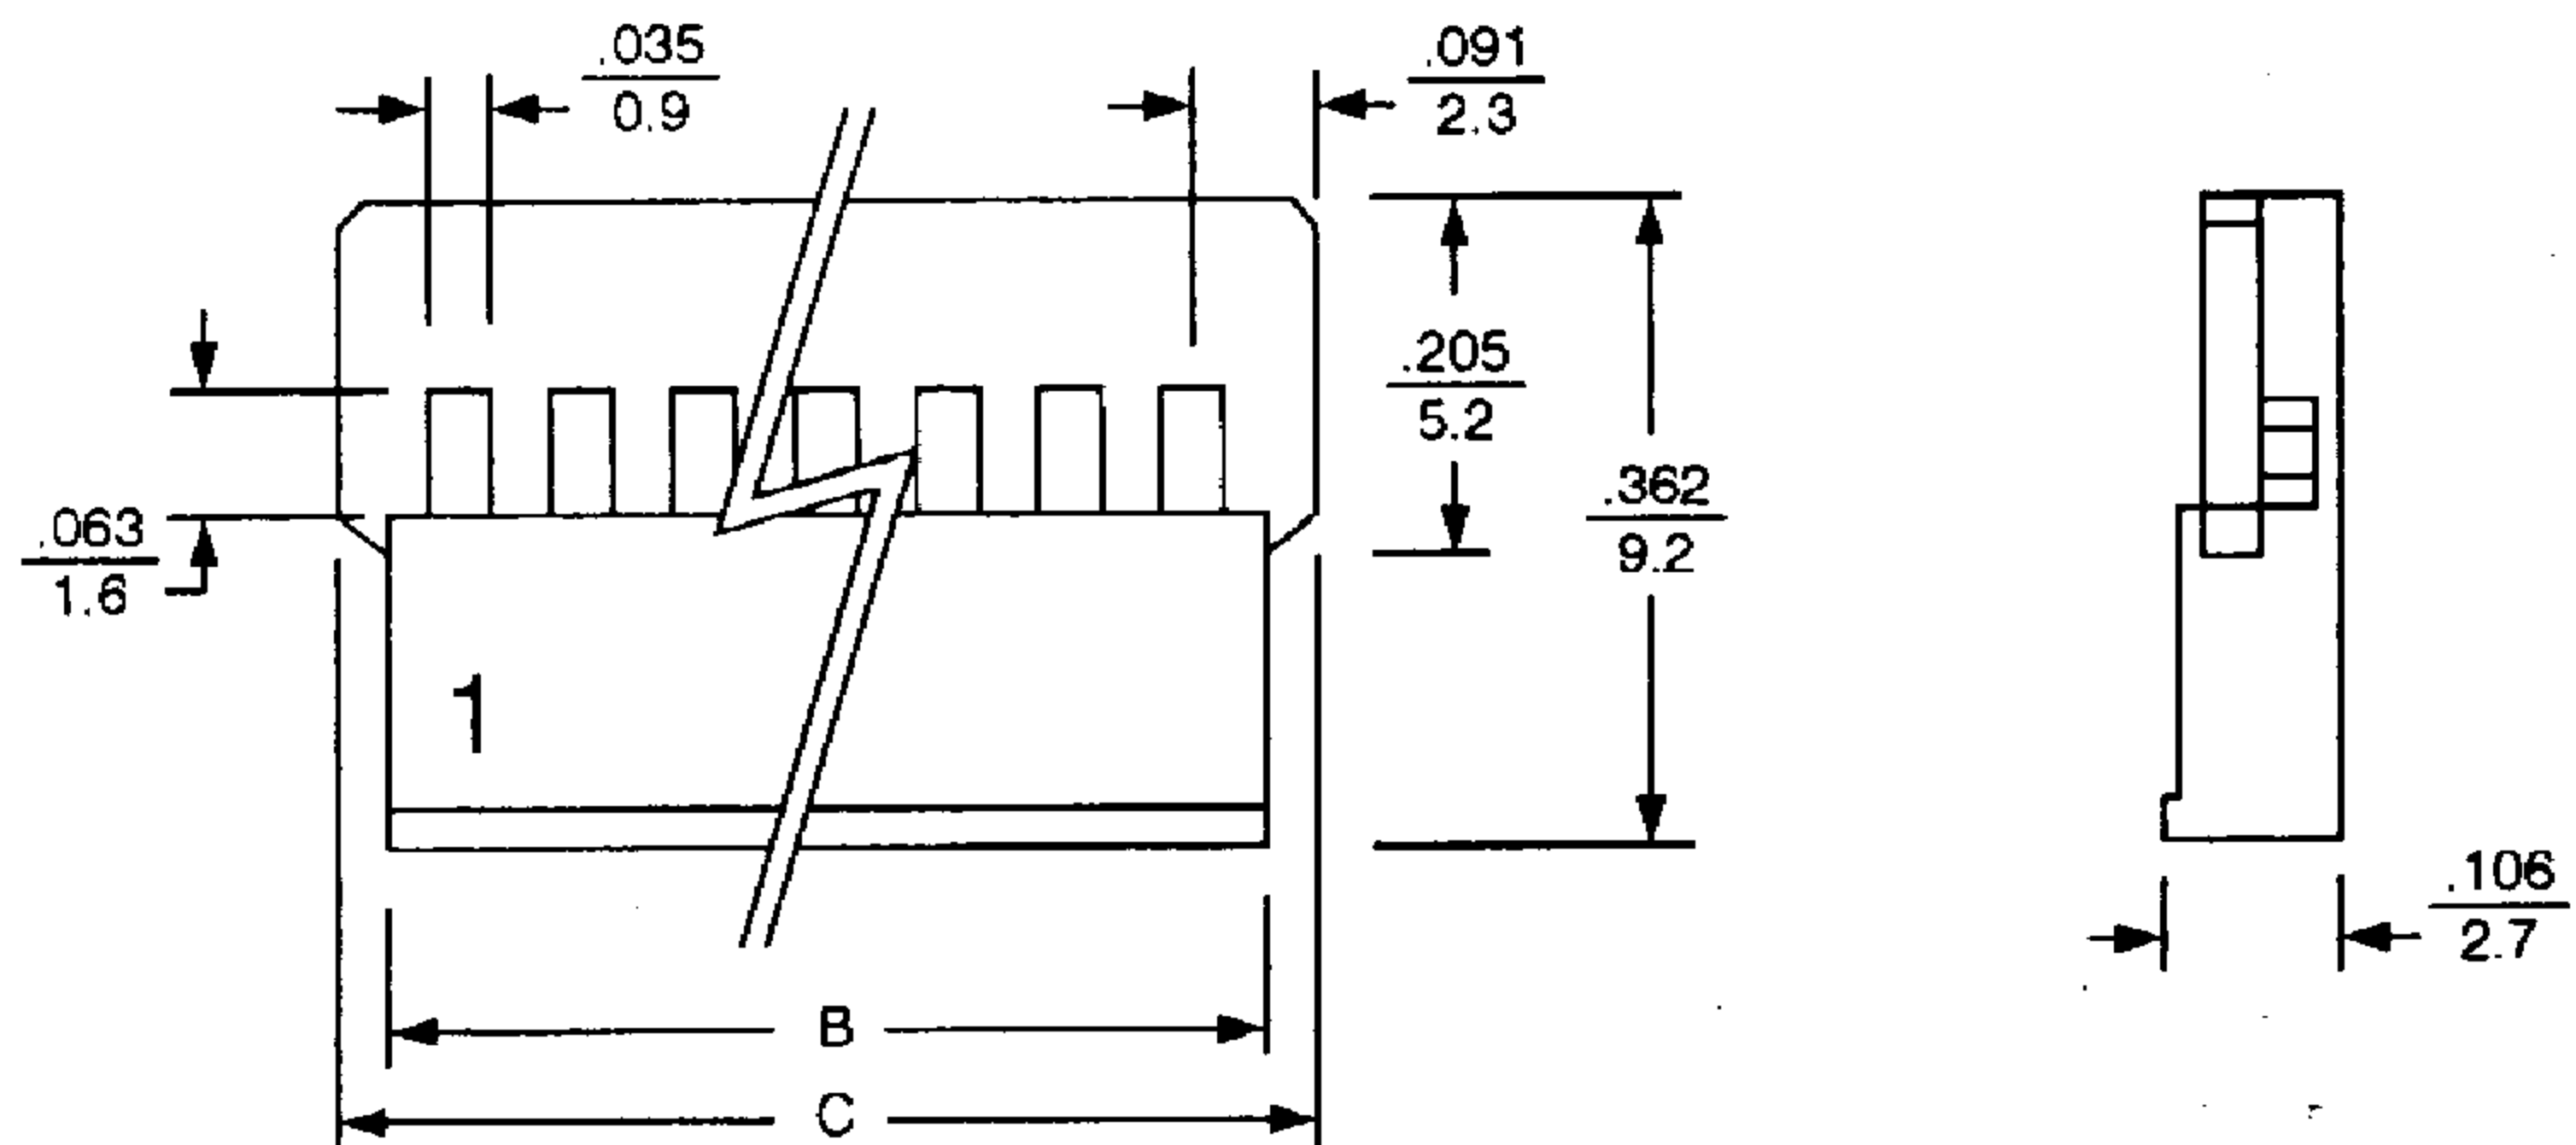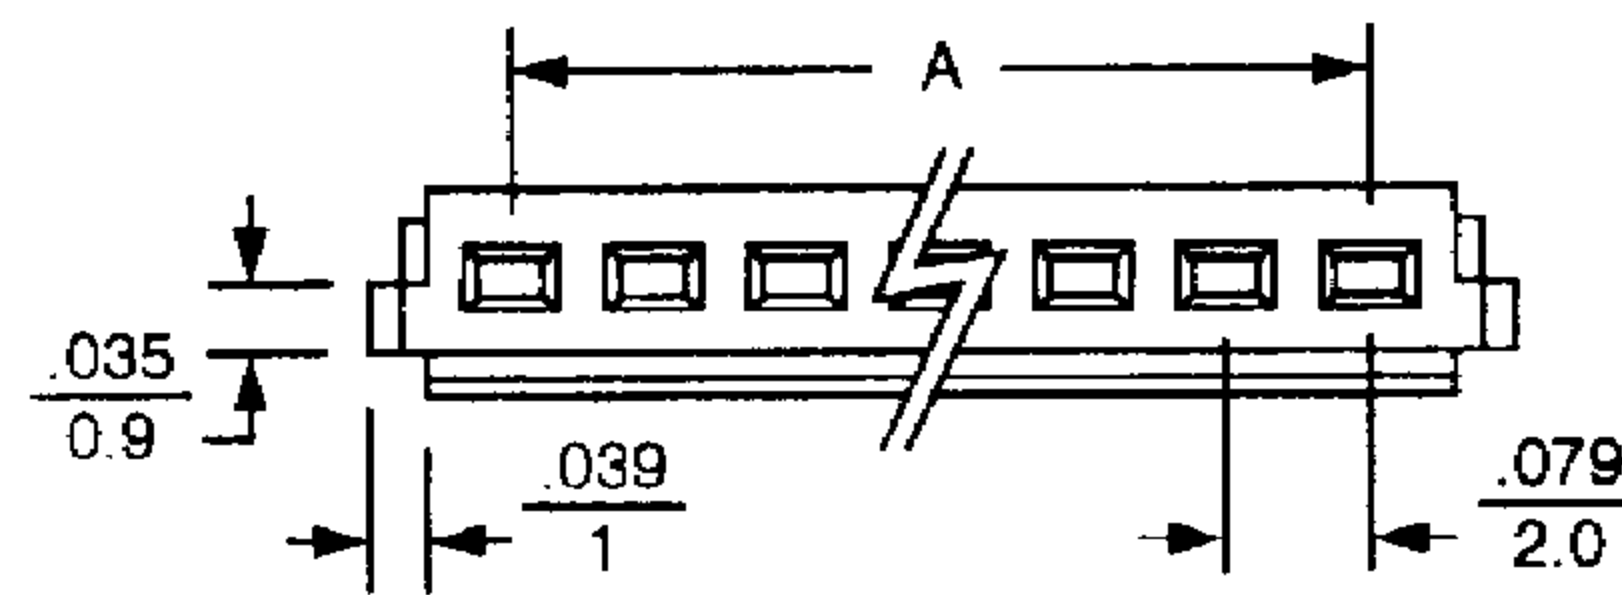

### Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	.079 ( 2.0)	.177( 4.5)	.256( 6.5)	7	.472 (12.0)	.571(14.5)	.650(16.5)
3	.157 ( 4.0)	.256( 6.5)	.335( 8.5)	8	.551 (14.0)	.650(16.5)	.728(18.5)
4	.236 ( 6.0)	.335( 8.5)	.413(10.5)	9	.630 (16.0)	.728(18.5)	.807(20.5)
5	.315 ( 8.0)	.413(10.5)	.492(12.5)	10	.709 (18.0)	.807(20.5)	.886(22.5)
6	.394 (10.0)	.492(12.5)	.571(14.5)				