
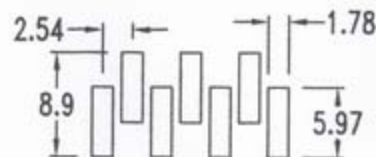
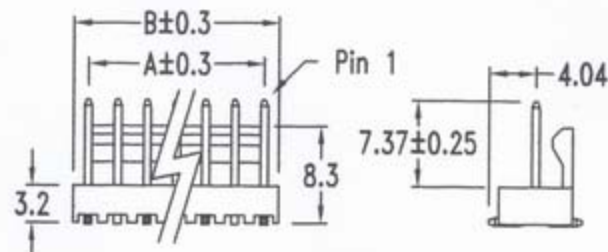



Features:

- 2 ~ 20 circuits available
- Material: UL 94V-0 nylon 46
- .025"(0.64mm) square pin
- Standard color: Brown
- Friction lock
- Various pin lengths available
- Mates with 25405H-N housing
- Tin plated brass pins. Plating options available



P. C. board layout

Rev.	DESCRIPTION	DATE	APPD.

Specifications:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.54	5.08	6	12.70	15.24	10	22.86	25.40	14	33.02	35.56	18	43.18	45.72
3	5.08	7.62	7	15.24	17.78	11	25.40	27.94	15	35.56	38.10	19	45.72	48.26
4	7.62	10.16	8	17.78	20.32	12	27.94	30.48	16	38.10	40.64	20	48.26	50.80
5	10.16	12.70	9	20.32	22.86	13	30.48	33.02	17	40.64	43.18			

CUSTOMER APPROVAL

UNLESS OTHERWISE
SPECIFIED TOLERANCE

.000 ± 0.05 (mm)

.00 ± 0.15 (mm)

.0 ± 0.25 (mm)

UNIT:mm

Material:

Finish:

Q'ty:

APPROVAL

DRAWN:

DESIGNED:

CHECKED:

APPROVED:

DATE

YiYang Electronic Co., Ltd.

TITLE: .100"(2.54mm) Top Entry Type, SMT

P/N: 25405WS-N Series

Eng. No.: 2516W-xx0000