


# .165" (4.2mm) Power Connector System

## 42001WS-N Series

### Vertical Header

- Available in 2 to 24 circuits
- Terminal: Tin-plated
- Housing: UL 94V-2 nylon 66
- Current rating up to 9 amperes per circuit
- Positive housing locks
- With or without mounting pegs
- With or without drain holes
- Mate with 42001HM-N series housing
- Voltage Rating: 600V AC, DC (R.M.S.)
- Dielectric Withstanding Voltage: 1500V AC/minute
- Ambient Temperature Range: -40°C ~ 105°C

inches  
mm

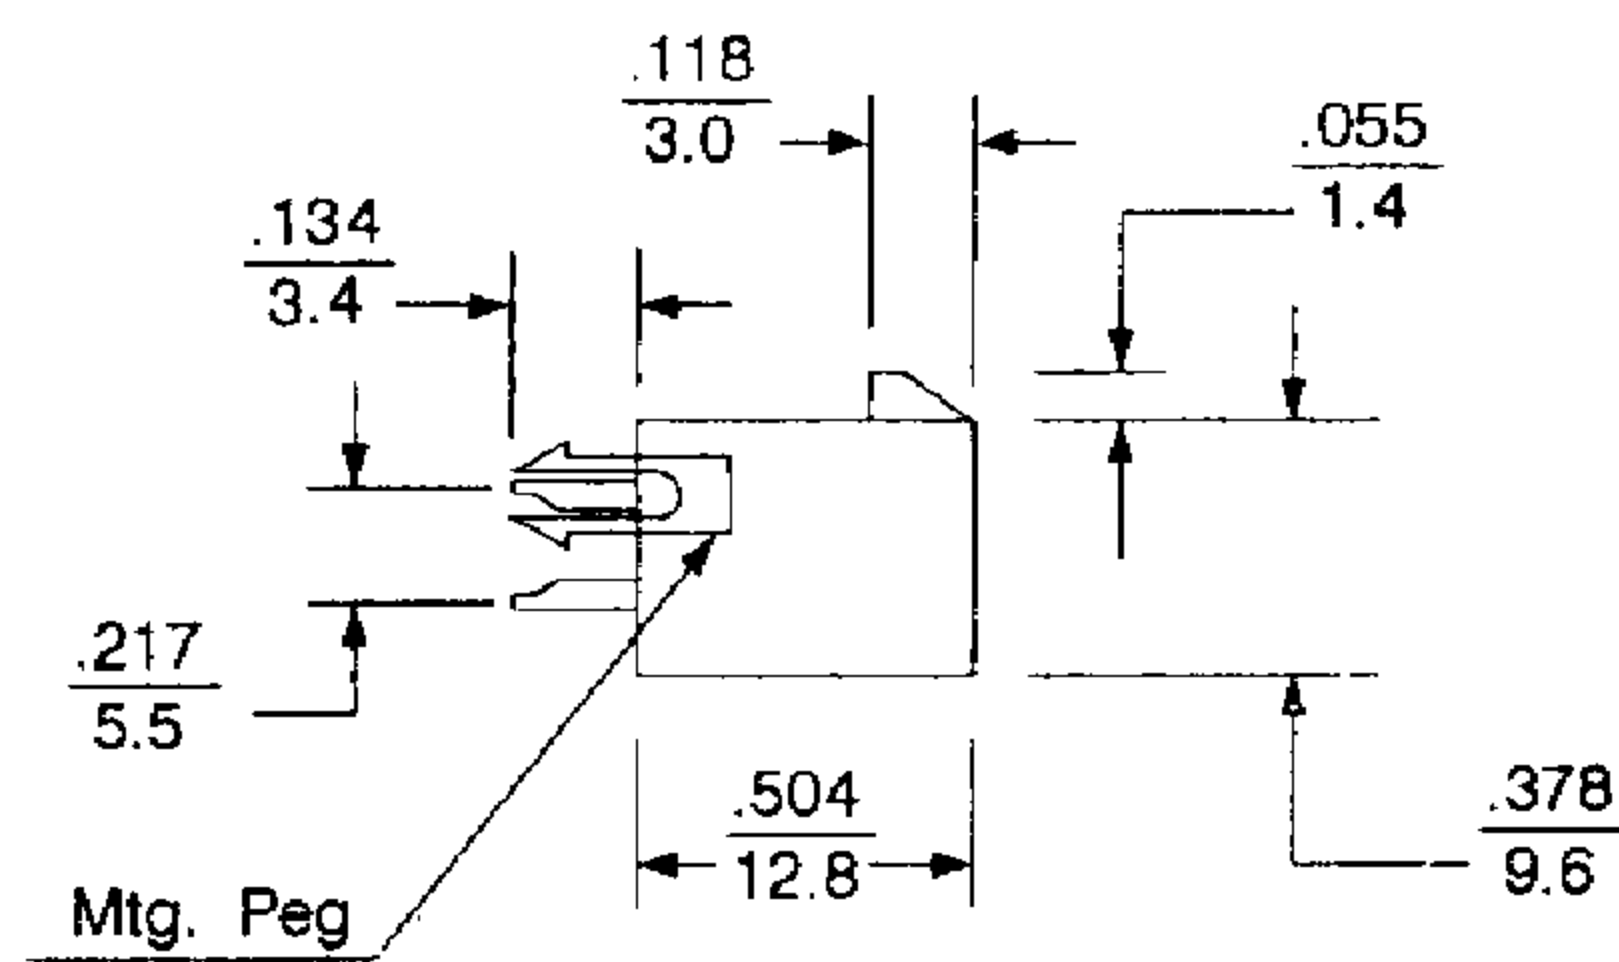

42001WSP-N (with Mtg. Pegs)  
42001WS-N (without Mtg. Pegs)

42001WSDP-N (with Mtg. Pegs)  
42001WSD-N (without Mtg. Pegs)

Circuits	Dimensional Information	
	Vertical Header (Without Drain Holes)	Vertical Header (With Drain Holes)
2	<p>42001WSP-02 (with Mtg. Pegs) 42001WS-02 (without Mtg. Pegs)</p>	<p>42001WSDP-02 (with Mtg. Pegs) 42001WSD-02 (without Mtg. Pegs)</p>
4	<p>42001WSP-04 (with Mtg. Pegs) 42001WS-04 (without Mtg. Pegs)</p>	<p>42001WSDP-04 (with Mtg. Pegs) 42001WSD-04 (without Mtg. Pegs)</p>